


# TALYST®




## AUTOFREEZE+H: Secure Freezer Storage

### Specification Sheet


**AutoFreeze+H** delivers access-controlled frozen storage and computer driven dispensing for your valuable frozen medications. It enables centralized control and reporting, and is scalable to accommodate expanding needs and satellite locations. AutoFreeze+H is fully integrated with AutoPharm® Enterprise software to provide one inventory solution.

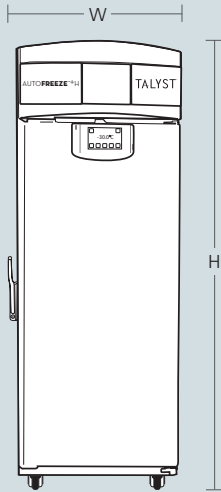

[ Front View ]

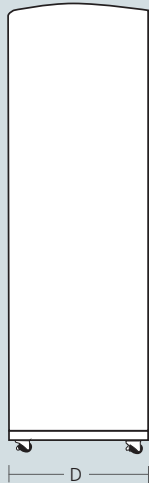

[ Side View ]



[ Top View ]

**DIMENSIONS**

- Width:** 30.75"
- Depth:** 29.5"
- Height:** 80"
- Weight:** 443 lbs/201 kg

## AUTOFREEZE™+H: Specifications

**Improved Patient Safety**

AutoFreeze+H supports bar code confirmation of all dispensing and put-away activities for your frozen medications. It limits personnel actions through password secured doors.

**Complete Inventory Control**

AutoFreeze+H can consolidate your frozen medications as a part of a comprehensive, integrated inventory system. It enables easy, centralized control and perpetual inventory management based on par-levels, and supports integrated wholesale ordering.

**Enhanced Efficiency**

AutoFreeze+H integrates with Talyst's AutoPharm® Enterprise and AutoVault® to enable seamless and complete management of your medication inventory from arrival at the pharmacy to delivery to the patient care area.

**CAPACITY**

- Number of Shelves:** 4
- Number of Totes per Shelf:** 0 to 20
- Total Number of Totes:** 0 to 80
- Volume per Tote:** max 7.76 liters
- Total Capacity by Volume:** max 96.7 liters
- Bins and Dividers Purchased Separately**

**FEATURES**

- Digital Temperature Display**
- Automatic Temperature Logging**
- Locking Heavy-Duty Casters**
- Air cooled, forced air refrigeration system for uniform temperature and quick recovery**
- Dual temperature probes**
- Color:** Blue
- Lockable Front Door:** Yes
- Operation Display:** Yes

**OPERATION**

- Uniform Internal Temperature:** +/-2° at -30°C setpoint
- Number of Thermistors:** 2
- Number of Compressors:** 1
- Refrigerant:** R-404A Non-CFC
- Environment Temperature:** 15° to 32°C
- Environment Humidity:** max 80%
- Workstation Required:** Yes
- Workstation Operating System:** Windows 7
- Interior Operating Range:** -15° to -30°c

**POWER**

- Main Power:** 208/230 VAC 4.3/3.8 FLA
- Required:** NEMA 6-15 Hospital Grade
- Duty Cycle:** 100%
- Manual Operation, if Needed:** Yes

NOTE: The AutoFreeze+H is UL/CSA Compliant.

## AUTOFREEZE+H: Site Requirements

**CLEARANCE REQUIRED:**

- Right & Left Sides:** 1.5"
- Back:** 3.0"
- Top:** 8.0"

Prior to installation, a site survey will be completed to ensure there are no physical obstructions that would affect installation.